


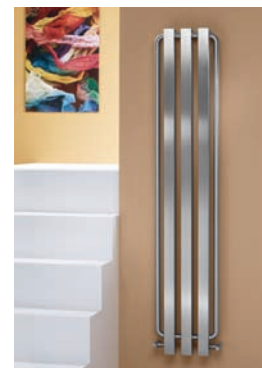




MESSENGER OF DREAMS
A radiator of high quality and simple refinement. Hermes will bring your dreams into reality.

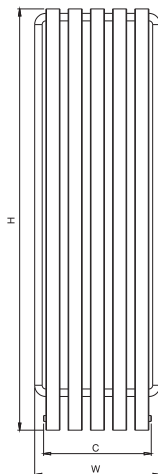

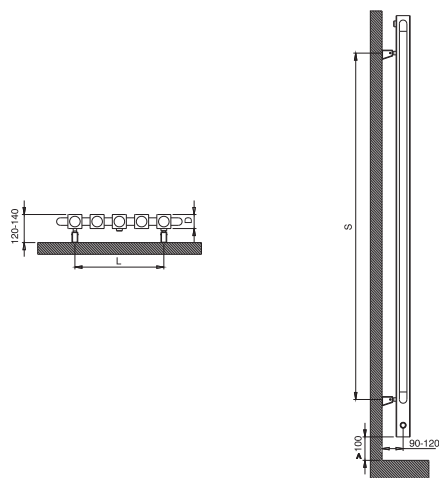

hermes

material	finish	electric version	wall installation	warranty
stainless steel	satin polished	not available	vertical	10 years

max. working pressure: 10 bar
 max. working temperature: 95°C
 all dimensions are in mm.
 connections 1/2"

Product Code	Width	Height	Depth	Connection Centers	Tube Quantity	Assembly Axis		Weight	Water Capacity	THERMAL POWER		
	W	H	D	C		S	L	kg.	lt.	btu	k/cal	watt
HER035015000309	350	1500	70	270	3	1180	190	23,8	8,4	4308	1086	1262
HER035018000309	350	1800	70	270	3	1480	190	30,7	10,1	4493	1132	1317
HER035020000309	350	2000	70	270	3	1680	190	37,6	11,2	3981	1003	1166
HER044515000409	445	1500	70	365	4	1180	285	28,5	10,5	5734	1445	1680
HER044518000409	445	1800	70	365	4	1480	285	36,8	12,7	5982	1507	1753
HER044520000409	445	2000	70	365	4	1680	285	45,1	14,1	5300	1336	1553
HER054015000509	540	1500	70	460	5	1180	380	31,7	12,7	7159	1804	2098
HER054018000509	540	1800	70	460	5	1480	380	40,9	15,2	7470	1882	2189
HER054020000509	540	2000	70	460	5	1680	380	50,1	16,9	6620	1668	1940

Vermogen (Watt) berekend op 75/65/20 graden Delta T50






Bij 90/70/20 graden vermenigvuldig het vermogen met 1.26

HERMES

The contents of this document are property of Termosan® and should not be copied, reproduced or disclosed to a third party without written consent of the proprietor.

www.carisa.com.tr

www.termosan.com
info@termosan.com

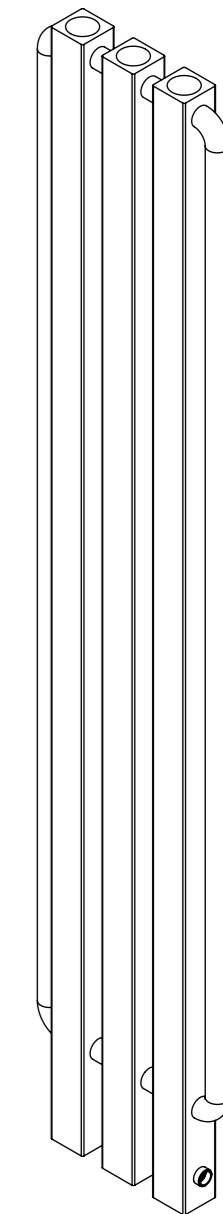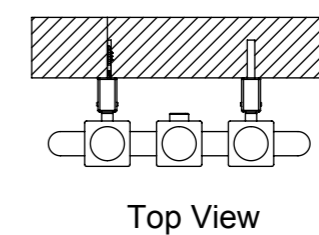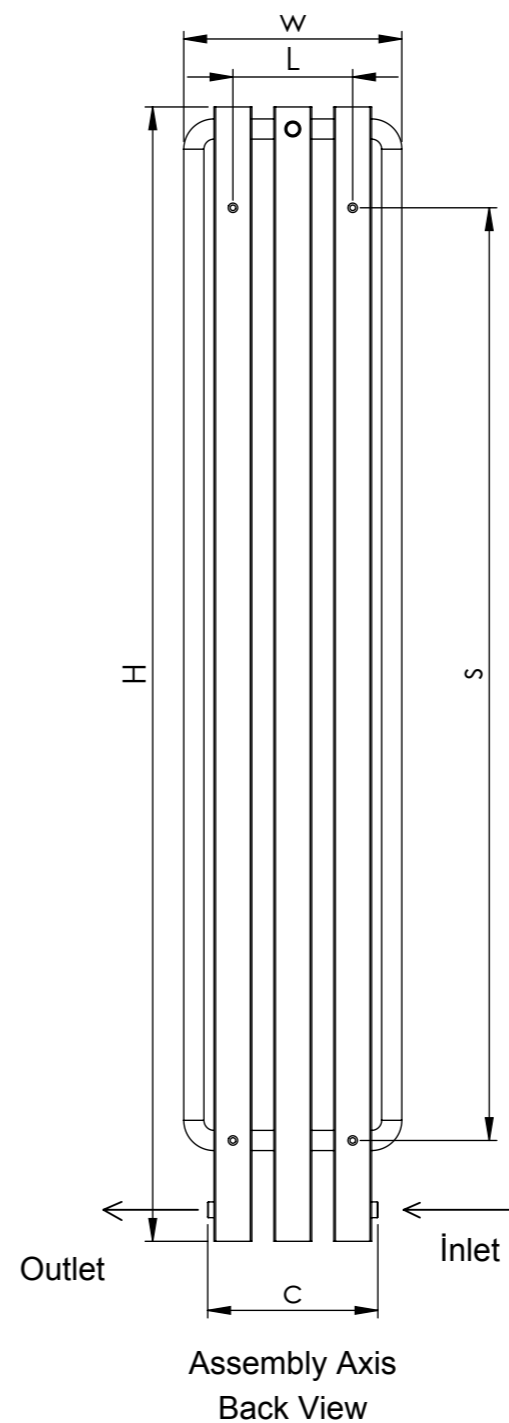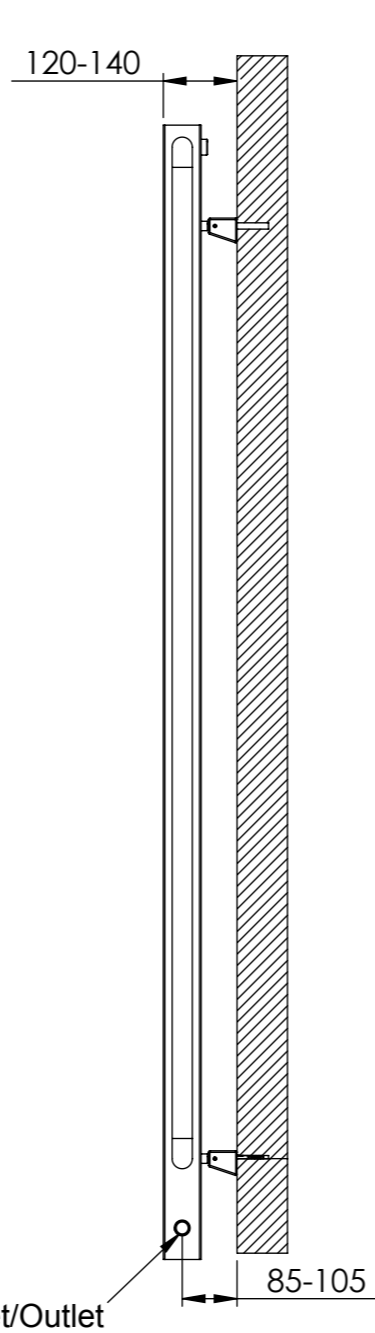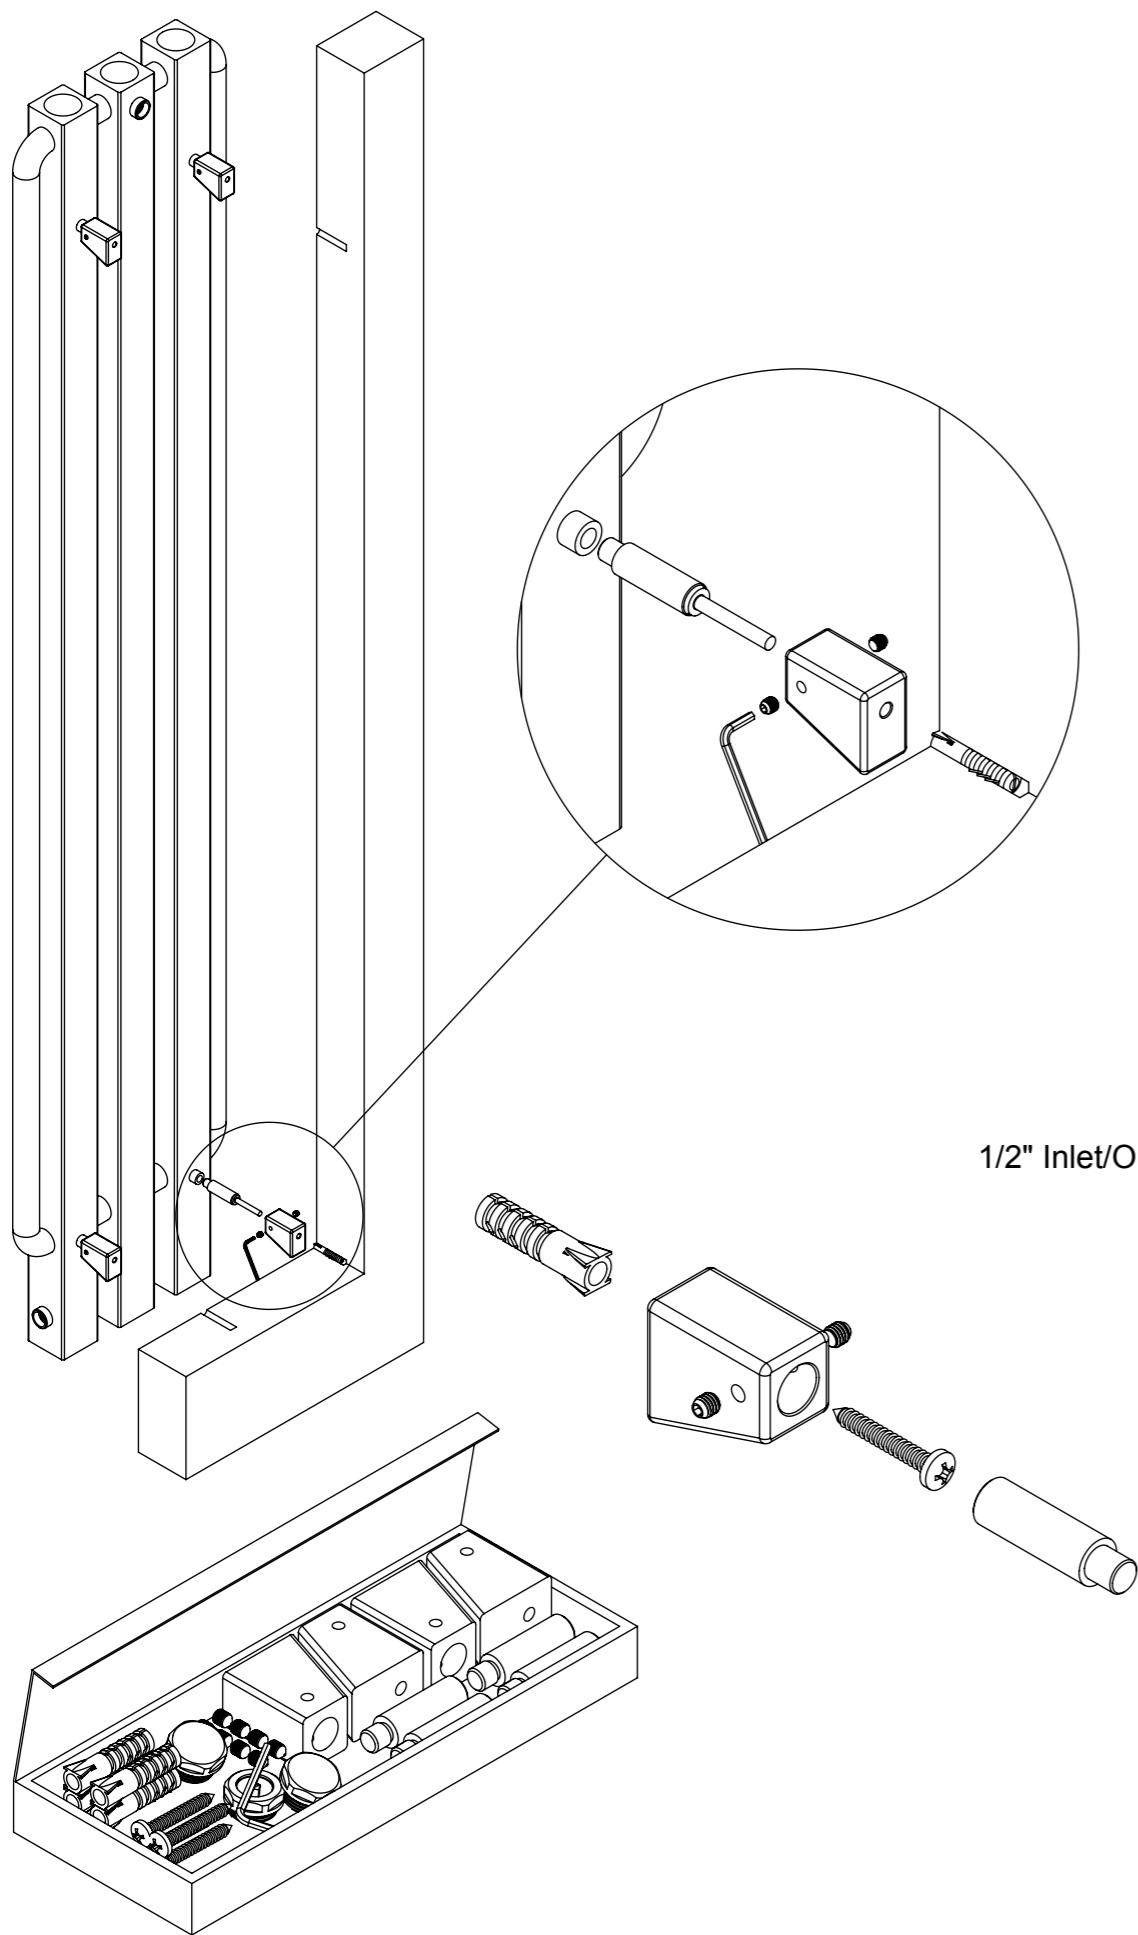


carisa®
design radiator

Product Code	Width	Height	Depth	Connection Centers	Tube Quantity	Assembly Axis		Weight	Water Capacity
	W	H	D	C		S	L	kg.	lt.
HER035015000309	350	1500	70	270	3	1180	190	23,8	8,4
HER035018000309	350	1800	70	270	3	1480	190	30,7	10,1
HER035020000309	350	2000	70	270	3	1680	190	37,6	11,2
HER044515000409	445	1500	70	365	4	1180	285	28,5	10,5
HER044518000409	445	1800	70	365	4	1480	285	36,8	12,7
HER044520000409	445	2000	70	365	4	1680	285	45,1	14,1
HER054015000509	540	1500	70	460	5	1180	380	31,7	12,7
HER054018000509	540	1800	70	460	5	1480	380	40,9	15,2
HER054020000509	540	2000	70	460	5	1680	380	50,1	16,9