


# alias



## AESTHETICAL AMBIANCE





Alias, perfectly designed stainless steel bars, tripled and grouped with elegance. A perfect solution in a bathroom or kitchen.

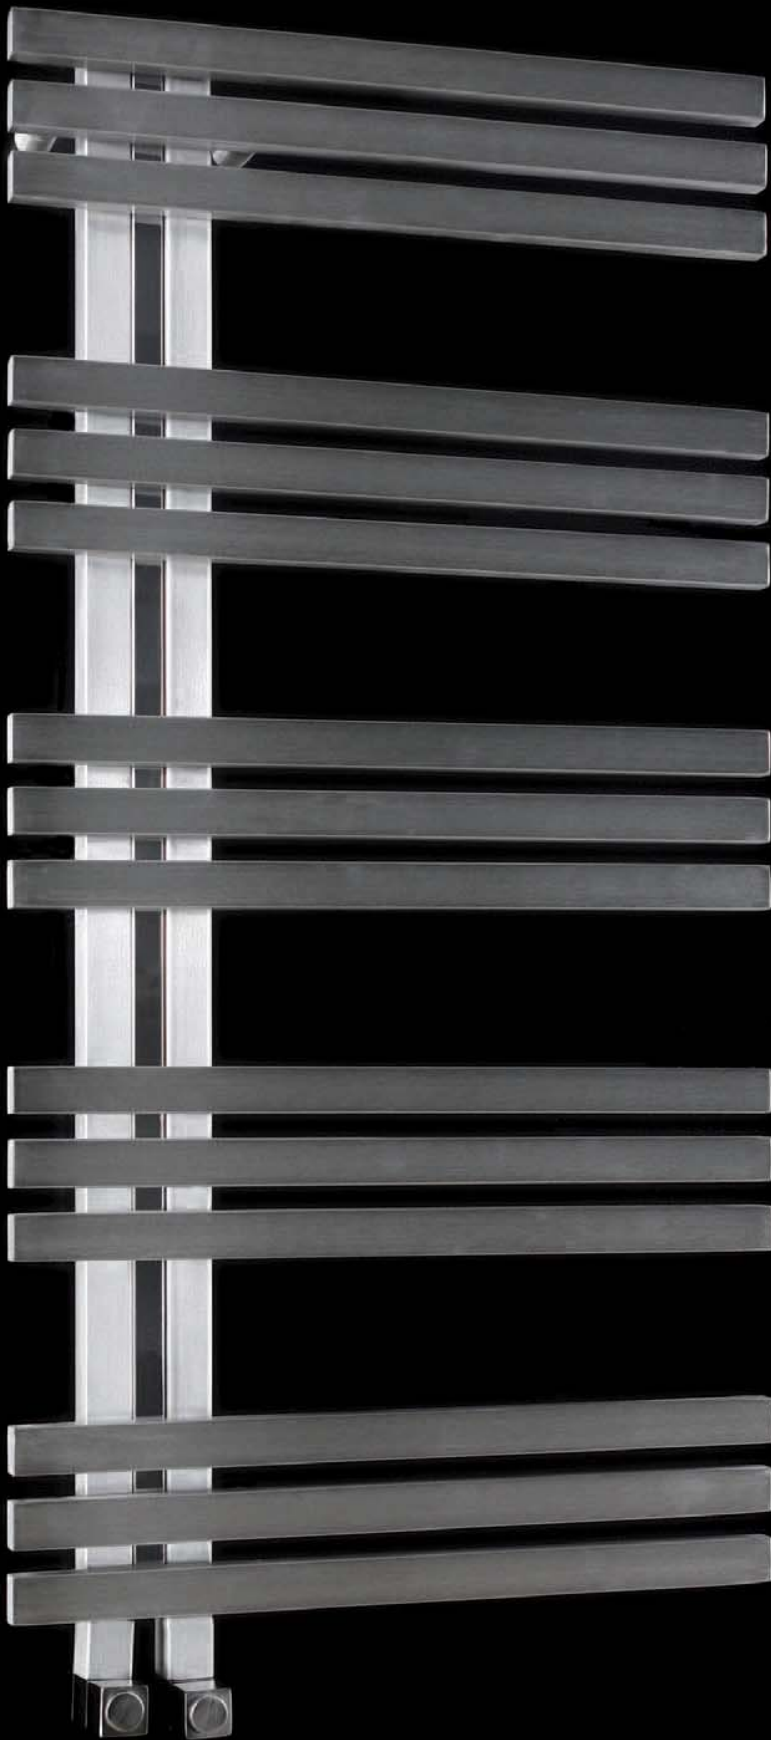

technical specs page 104



**alias**

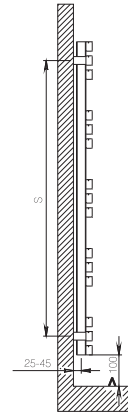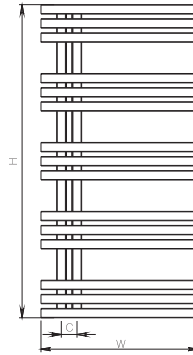

material	finish	electric version	wall installation	warranty
stainless steel	satin polished	600 W	vertical	5 years


max. working pressure: 10 bar  
 max. working temperature: 95°C  
 all dimensions are in mm.  
 connections 1/2"  
 middle connection available

Product Code	Width	Height	Depth	Connection Centers	Tube Quantity	Assembly Axis		Weight	Water Capacity	THERMAL POWER		
	W	H	D	C		S	L	kg.	lt.	btu	k/cal	watt
ALI050010001509	500	1000	60	50	15	850	130	11,5	10,6	1809	456	530


Vermogen (Watt) berekend op 75/65/20 graden Delta T50  
 Bij 90/70/20 graden vermenigvuldig het vermogen met 1.26

# ALIAS


The contents of this document are property of Termosart® and should not be copied, reproduced or disclosed to a third party without written consent of the proprietor.

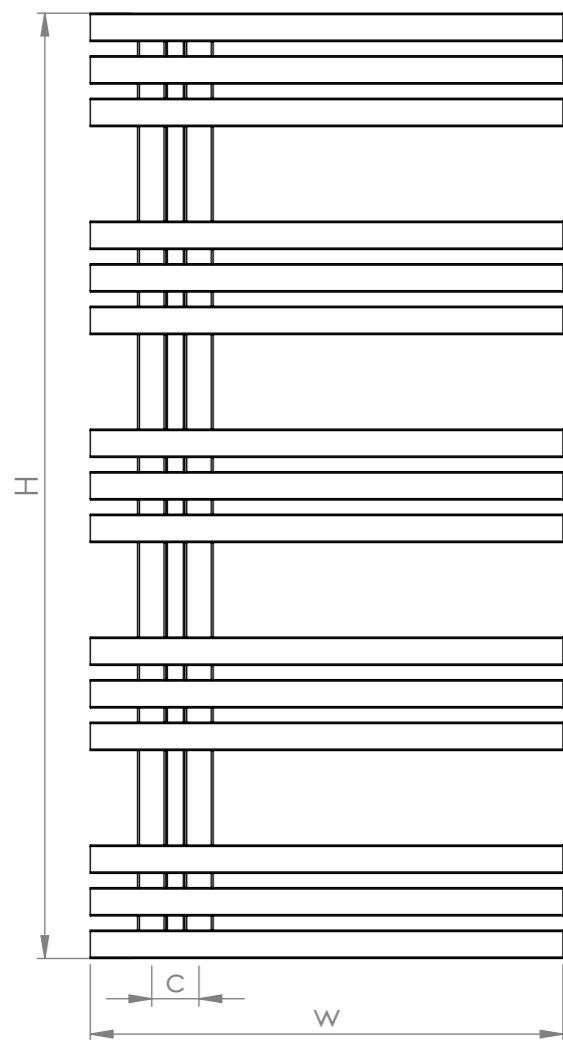



Front View

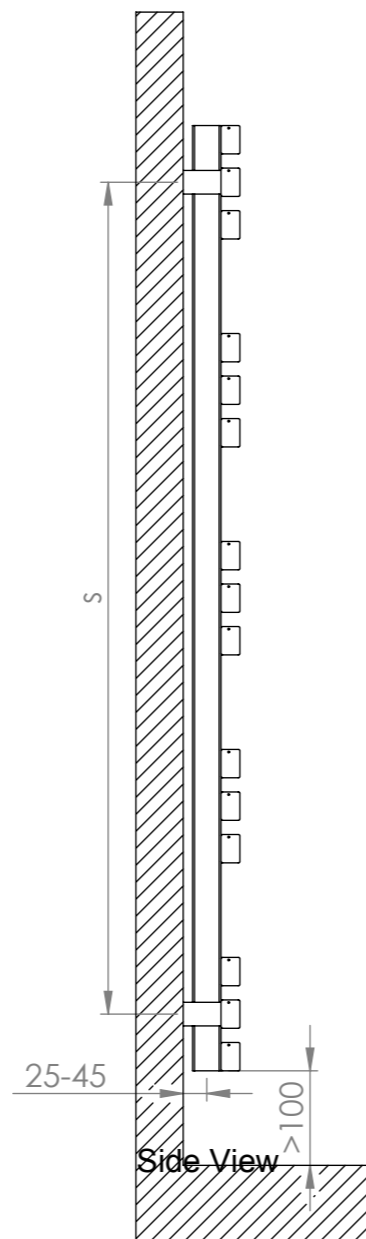



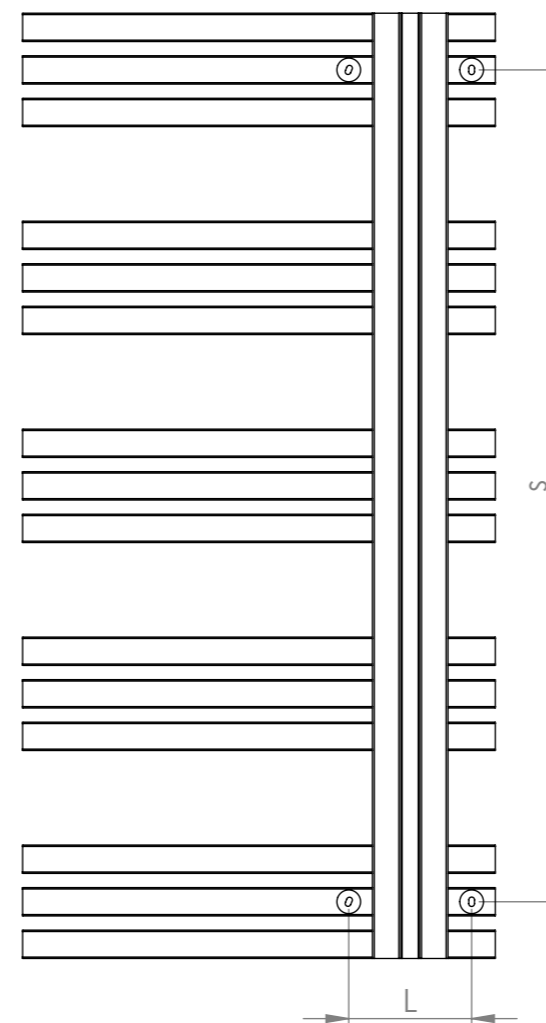


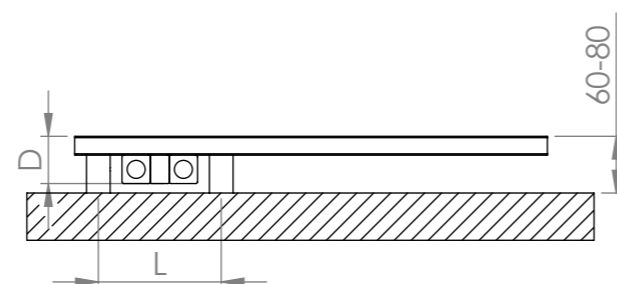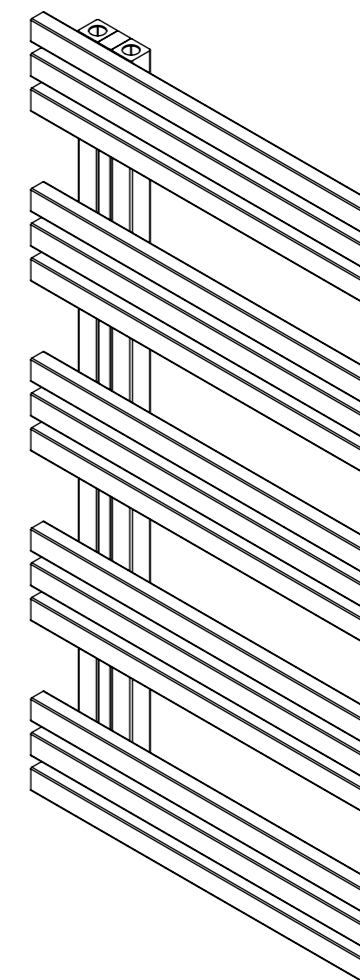


Side View



Back View  
Assembly Axis



Top View

- |    |   |                  |        |
|----|---|------------------|--------|
| 1- |  | Allen Key        | 1 pcs. |
| 2- |  | Brackets         | 4 pcs  |
| 3- |  | Short Bolt       | 4 pcs  |
| 4- |  | Set Screw        | 8 pcs  |
| 5- |  | Wall Plug        | 4 pcs  |
| 6- |  | Secrev, dia 6mm. | 4 pcs. |
| 7- |  | Air Vent         | 1 pcs  |
| 8- |  | Blanking Plug    | 1 pcs  |

Inlet / Outlet : 1/2" BSP(British Standart Pipe)  
DIN ISO 228

Product Code	Width	Height	Conn. Centers	Assembly Axis		Depth	No. Of Tubes
	W	H	C	S	L	D	
ALI050010001509	500	1000	50	880	130	50	15