





VERY HOT, VERY ELEGANT

If you need a radiator under your window, Futura is just for you. Very effective and very minimalist. Your interiors will change, and even you will be surprised.





futura

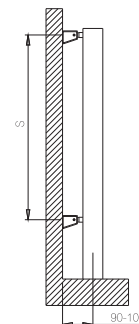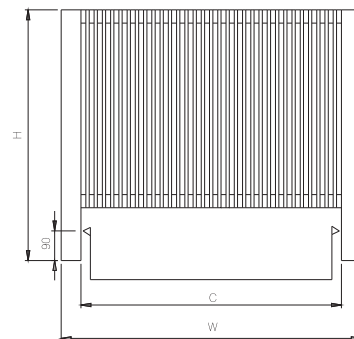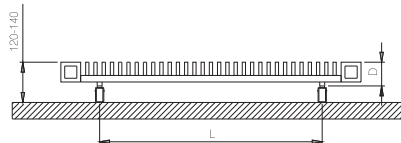

material	finish	electric version	wall installation	warranty
stainless steel	satın polished	not available	floor standing	10 years

max. working pressure: 10 bar
 max. working temperature: 95°C
 all dimensions are in mm.
 connections 1/2"

Product Code	Width	Height	Depth	Connection Centers	Tube Quantity	Assembly Axis		Weight	Water Capacity	THERMAL POWER		
	W	H	D	C		S	L	kg.	lt.	btu	k/cal	watt
FUT061007602109	610	760	70	490	21	545	375	18,8	5,9	3392	855	994
FUT071007602509	710	760	70	590	25	545	475	21,2	6,6	3910	985	1146
FUT081007602909	810	760	70	690	29	545	575	23,6	7,3	4370	1101	1280
FUT091007603309	910	760	70	790	33	545	675	26,1	7,9	4829	1217	1415
FUT111007604109	1110	760	70	990	41	545	875	31,1	9,2	5289	1333	1550

Vermogen (Watt) berekend op 75/65/20 graden Delta T50
 Bij 90/70/20 graden vermenigvuldig het vermogen met 1.26

FUTURA












carisa[®]
design radiator

The contents of this document are property of Termosan[®] and should not be copied, reproduced or disclosed to a third party without written consent of the proprietor.

www.carisa.com.tr

www.termosan.com
info@termosan.com

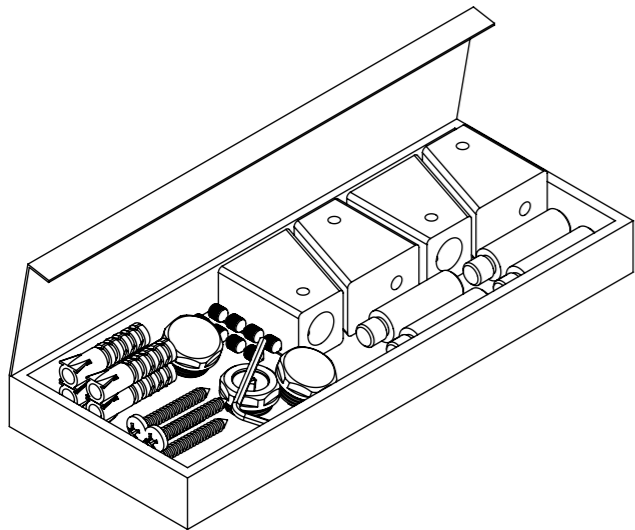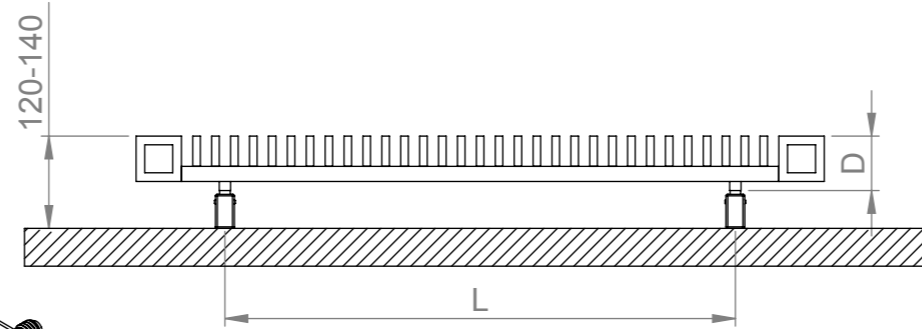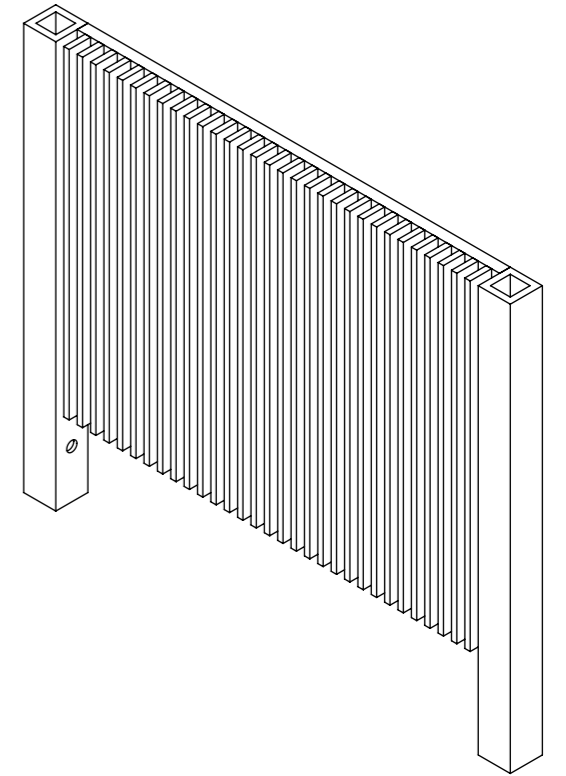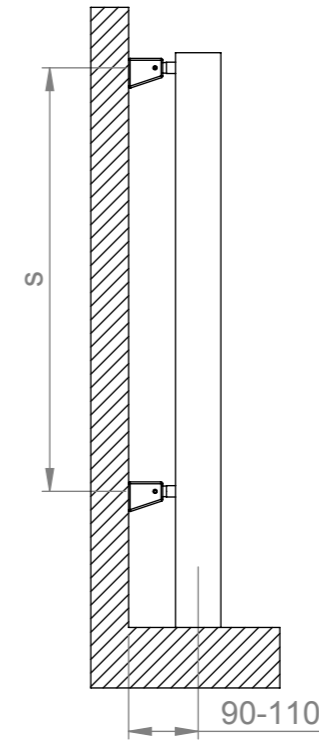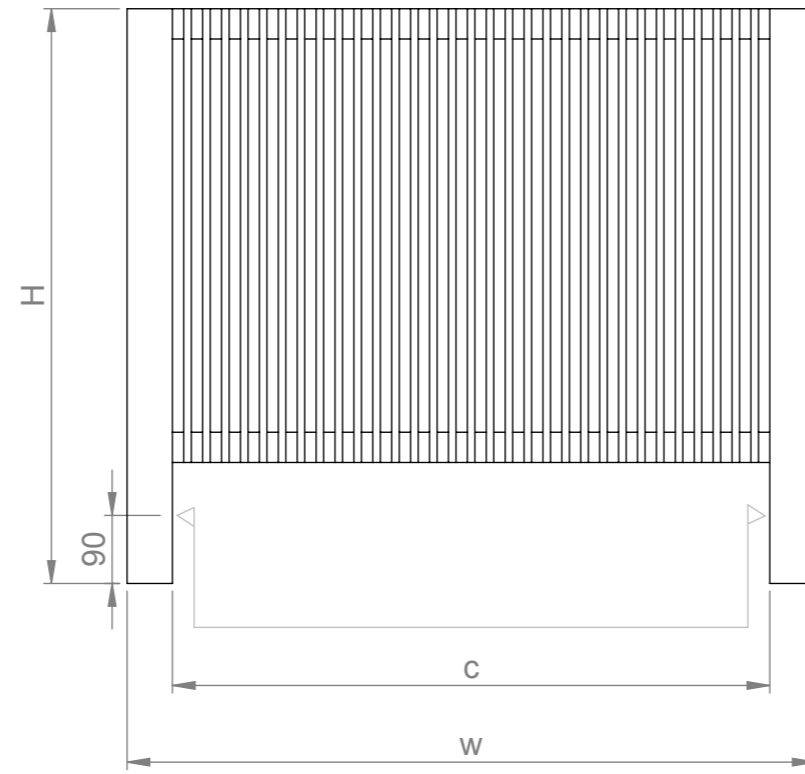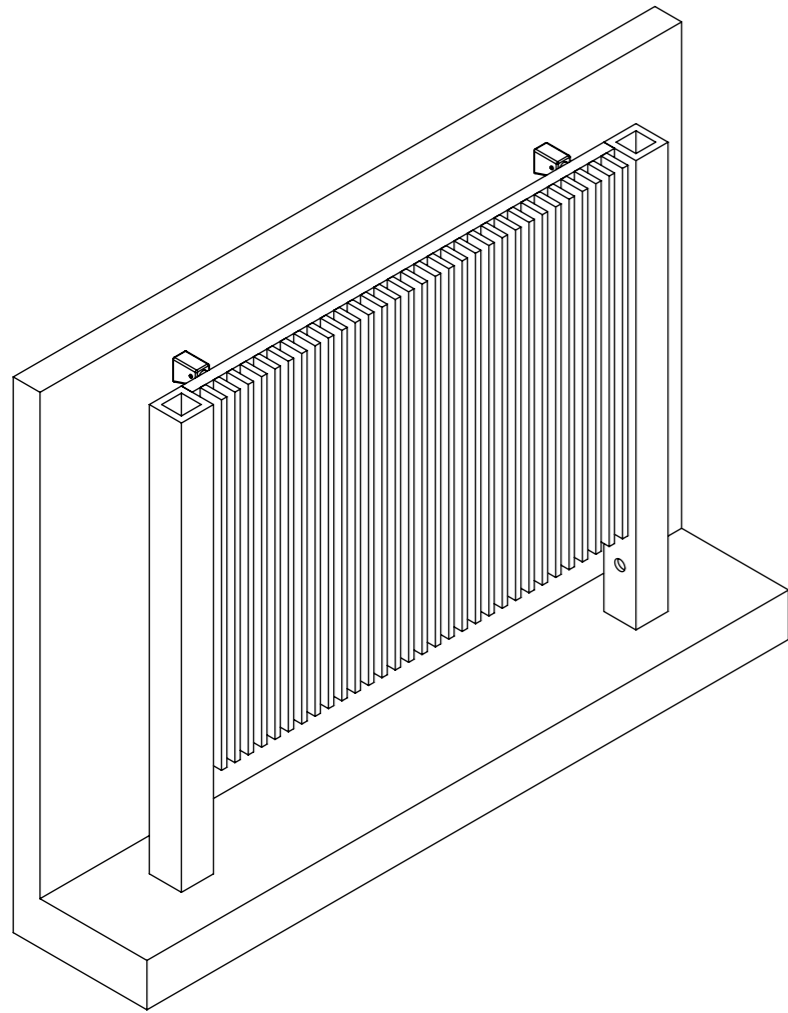

Product Code	Width	Height	Depth	Connection Centers	Tube Quantity	Assembly Axis		Weight	Water Capacity
	W	H	D	C		S	L	kg.	lt.
FUT061007602109	610	760	70	490	21	560	375	18,8	6,0
FUT071007602509	710	760	70	590	25	560	475	21,2	6,6
FUT081007602909	810	760	70	690	29	560	575	23,6	7,3
FUT091007603309	910	760	70	790	33	560	675	26,1	7,9
FUT111007603309	1110	760	70	990	41	560	875	31,1	9,2